


TECHNICAL SPECIFICATION

MATERIALS: 3.0 mm. Gauge steel wire formed and Chrome plated.

WEIGHT: 55g (Without Sprinkler)

APPLICATION: For use with most 15mm and 20mm sprinkler heads in the upright or pendent position.

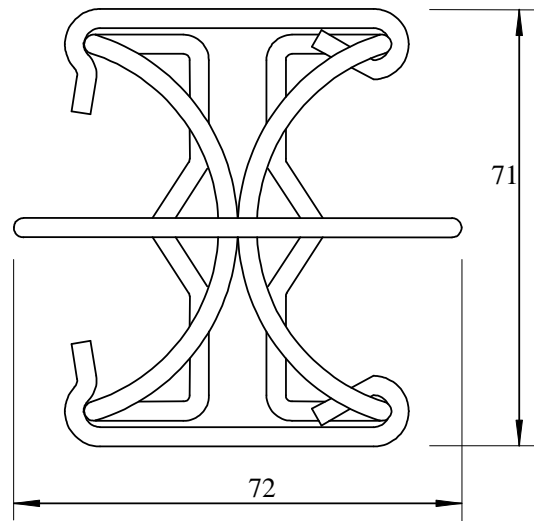

Note: Where a guarded pendent sprinkler requires a water shield use the GW Single piece stainless steel rosette.

For upright sprinklers requiring guards and water shields refer to the GW 'Miniature Guard' data sheet.

The right is reserved to vary or modify any specifications without prior notice.

GW SPRINKLER A/S
Kastanievej 15, DK 5620-Glamsbjerg, Denmark
TEL: +45 64722055 FAX: +45 64722255
Email: sales.dep@gwspinkler.com
Data sheet also available at www.gwspinkler.com

DATA SHEET No: GW SA025 1001 A

Data Sheet: Standard Sprinkler Guard

Page: Page 1 of 1
Date: 14th June 2007