


GW SPRINKLER GUARD RETROFIT

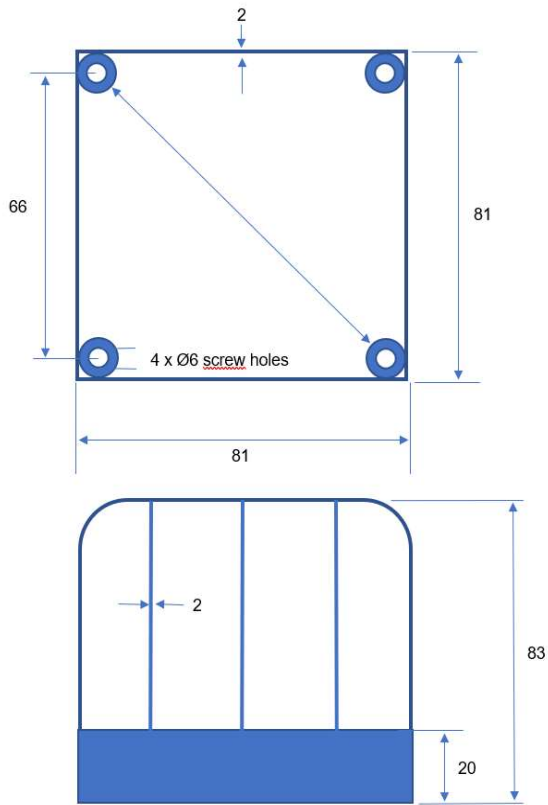

Part no.	BE07183 (natural)
Part no.	BE07183-M (powder coated – any RAL*)
Material	Steel plate & wire (SS304) - welded
Finish	Natural or any RAL colour
Material thickness	2mm (typical)
Weight	110 grams
Use on sprinkler type	Conventional, pendent and sidewall

* please specify requested RAL colour when ordering

Application:

The robust GW Guard Retrofit can easily be fitted to protect **existing sprinklers** from impact and damage. The guard will fit safely around any conventional (CUP), pendent (SSP) or sidewall sprinkler – also when fitted with escutcheon / rosette (max. diameter Ø75 mm).

Installation:

The guard is fitted centrally around the sprinkler and secured to the ceiling / wall with 4 screws (washers inside of each corner (4 x Ø6mm)).

GW SPRINKLER A/S

Kastanievej 15, DK-5620 Glamsbjerg, Denmark
Tel: +45 64 72 20 55 Fax: +45 64 72 22 55
E-mail: sales.dep@gwsprinkler.com

Data sheet: GW - Guard
Type: Retrofit

Page 1 of 2

Data sheet no.: **GW SA026 1001 A**

Date: 02 October 2019



GW-S SSP sprinkler with Ø75mm 2-piece rosette fully protected with GW Guard – Retrofit.



GW WHEC (horizontal sidewall) sprinkler with Ø75mm 2-piece rosette.

GW SPRINKLER A/S
Kastanievej 15, DK-5620 Glamsbjerg, Denmark
Tel: +45 64 72 20 55 Fax: +45 64 72 22 55
E-mail: sales.dep@gwsprinkler.com

Data sheet no.: **GW SA026 1001 A**

Data sheet: GW - Guard
Type: Retrofit

Page 2 of 2

Date: 02 October 2019